



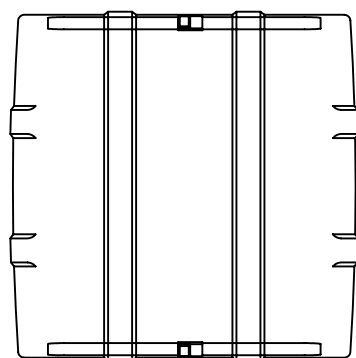


TOP VIEW

RECESSED, CAPTIVE PENTA BOLT

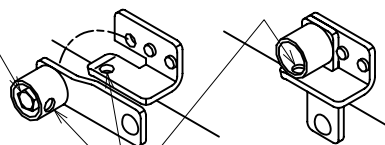

1/2" DIA. HOLE FOR PADLOCK

LATCH DETAIL




VENT
16 GAUGE (.060)
STAINLESS STEEL

LOUVER DETAIL

1/2" ANCHOR BOLT, NUT & FLATWASHER
(BY CUSTOMER)


MOUNTING FLANGE ON ENCLOSURE

ENCLOSURE HOLD DOWN DETAIL

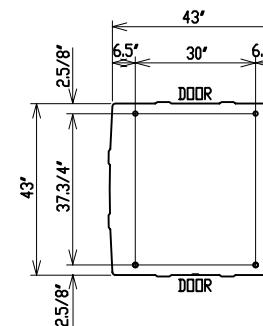

ANCHOR BOLT DIMENSIONS

ANCHOR BOLTS TO BE 1/2" DIA. AND TO EXTEND 1.1/2" MINIMUM ABOVE PAD. PROVIDE CABLE ENTRY AS REQUIRED.

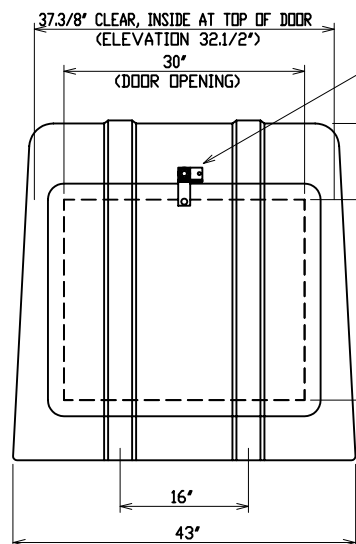


FRONT VIEW

SEE LATCH DETAIL

37.3/8" CLEAR, INSIDE AT TOP OF DOOR
(ELEVATION 32.1/2")
30"
(DOOR OPENING)
42"
25" (DOOR OPENING)
7.1/2"
16"
43"

VENTILATING LOUVER
ONE HIGH END SHOWN
ONE LOW END OPP.
SEE LOUVER DETAIL

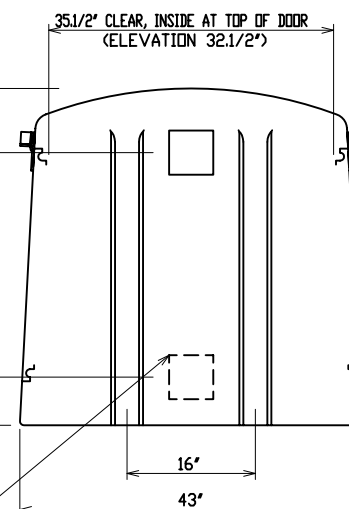

END VIEW

ORDERING INFORMATION:

MODEL PE 2 - 43 - 0 - L1 - WG
NUMBER OF DOORS
NOMINAL WIDTH
OVERALL HEIGHT
(AS SHOWN ON DRAWING)

LG - LIGHT GRAY
WG - LIGHT GREEN
MG - MUNSSELL GREEN
OTHER COLORS AVAIL.
CONSULT FACTORY

L1 - PROVISION FOR
PADLOCKING ONLY
L2 - PROVISION FOR
PADLOCKING & PENTA
HEAD BOLT
L4 - PROVISION FOR
PADLOCKING, PENTA HEAD
BOLT & INNER DOORS

NOTE:

1. MATERIAL:

- 1) FIBERGLASS LAMINATE 3/16" NOMINAL THICKNESS
- 2) EXTERIOR UV STABILIZED GELCOAT - 14 MIL NOMINAL THICKNESS
- WHITE INTERIOR GELCOAT
- 3) FIRE RETARDANT - DOES NOT SUPPORT COMBUSTION
- 4) STAINLESS STEEL HARDWARE
- 5) ESTIMATED WEIGHT-

2. STANDARDS:

- 1) CONFORMS TO IEEE C57.12.28, PADMOUNT EQUIPMENT ENCLOSURE INTEGRITY STANDARD
- 2) CERTIFIED TEST DATA OF ASTM STRUCTURAL STANDARDS AVAILABLE UPON REQUEST

ENCLOSURE DETAILS

PE2-43-0



POWER DESIGN INC.
ODELL, OREGON

DRAWN:
RB

PAGE

DATE
12-17-07

DRAWING NO.
3120

FILE REF: