



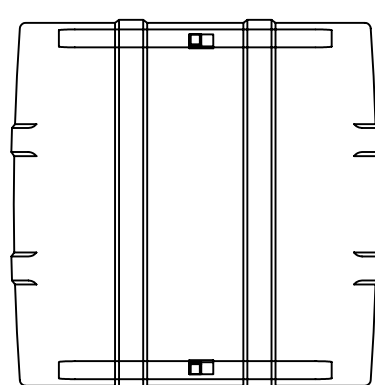


TOP VIEW

RECESSED, CAPTIVE PENTA BOLT

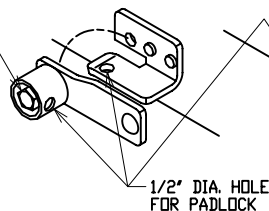

LATCH DETAIL

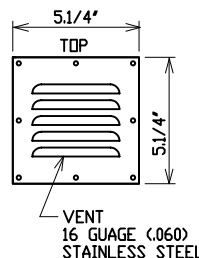


LOUVER DETAIL

1/2" ANCHOR BOLT, NUT & FLATWASHER  
(BY CUSTOMER)


MOUNTING FLANGE ON ENCLOSURE

ENCLOSURE HOLD DOWN DETAIL



ANCHOR BOLT DIMENSIONS


ANCHOR BOLTS TO BE 1/2" DIA. AND TO EXTEND 1 1/2" MINIMUM ABOVE PAD. PROVIDE CABLE ENTRY AS REQUIRED.

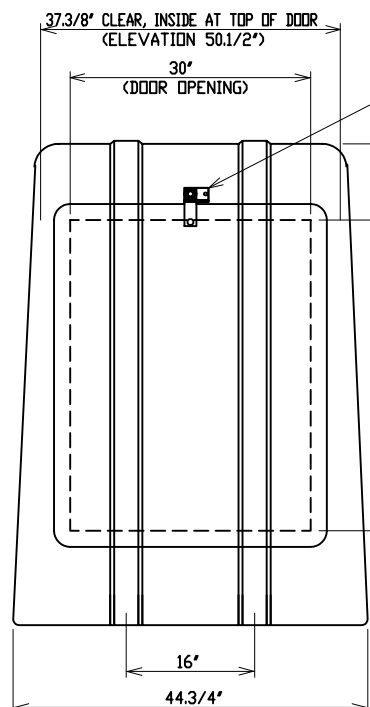

FRONT VIEW

SEE LATCH DETAIL

VENTILATING LOUVER  
ONE HIGH END SHOWN  
ONE LOW END OPP.  
SEE LOUVER DETAIL

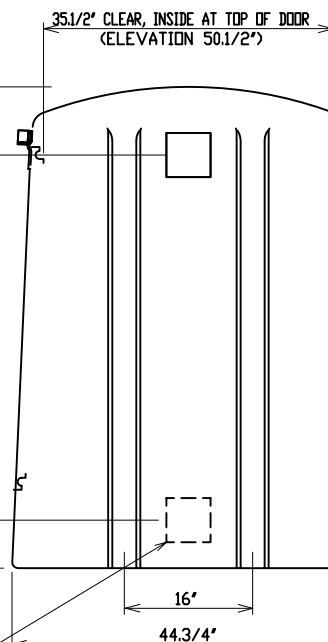

END VIEW

#### ORDERING INFORMATION:

MODEL PE 2 - 44 - 1 - L1 - WG  
NUMBER OF DOORS 2  
NOMINAL WIDTH 44  
OVERALL HEIGHT (AS SHOWN ON DRAWING) 60  
NOTE: L1 - PROVISION FOR PADLOCKING ONLY  
L2 - PROVISION FOR PADLOCKING & PENTA HEAD BOLT  
L4 - PROVISION FOR PADLOCKING, PENTA HEAD BOLT & INNER DOORS

#### 1. MATERIAL:

- 1) FIBERGLASS LAMINATE 3/16" NOMINAL THICKNESS
- 2) EXTERIOR UV STABILIZED GELCOAT - 14 MIL NOMINAL THICKNESS - WHITE INTERIOR GELCOAT
- 3) FIRE RETARDANT - DOES NOT SUPPORT COMBUSTION
- 4) STAINLESS STEEL HARDWARE
- 5) ESTIMATED WEIGHT -

#### 2. STANDARDS:

- 1) CONFORMS TO IEEE C57.12.28, PADMOUNT EQUIPMENT ENCLOSURE INTEGRITY STANDARD
- 2) CERTIFIED TEST DATA OF ASTM STRUCTURAL STANDARDS AVAILABLE UPON REQUEST

ENCLOSURE DETAILS

PE2-44-1



**POWER DESIGN INC.**

ODELL, OREGON

DRAWN:  
RB

PAGE

DATE  
12-17-07

DRAWING NO.  
3131

FILE REF: