



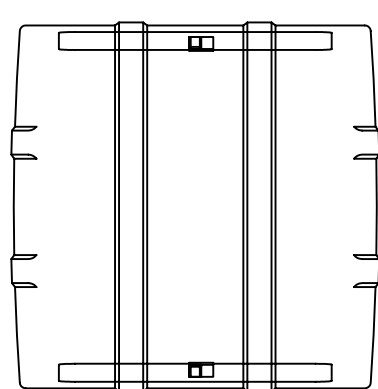


TOP VIEW

RECESSED, CAPTIVE PENTA BOLT

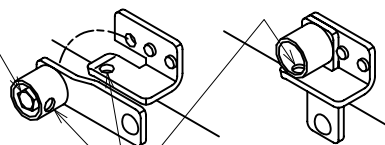

1/2" DIA. HOLE
FOR PADLOCK

LATCH DETAIL

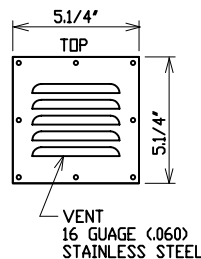


LOUVER DETAIL

1/2" ANCHOR BOLT, NUT & FLATWASHER
(BY CUSTOMER)


MOUNTING FLANGE ON ENCLOSURE

ENCLOSURE HOLD DOWN DETAIL

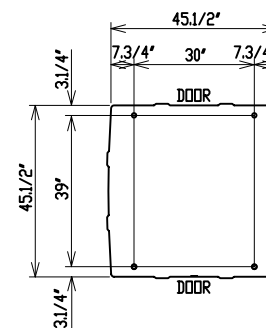

ANCHOR BOLT DIMENSIONS


ANCHOR BOLTS TO BE 1/2" DIA. AND TO EXTEND 1 1/2"
MINIMUM ABOVE PAD. PROVIDE CABLE ENTRY AS REQUIRED.

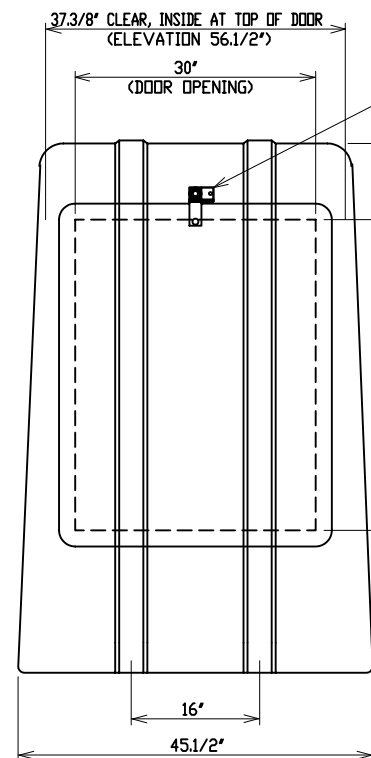

FRONT VIEW

SEE LATCH DETAIL

35.1/2" CLEAR, INSIDE AT TOP OF DOOR
(ELEVATION 56.1/2")

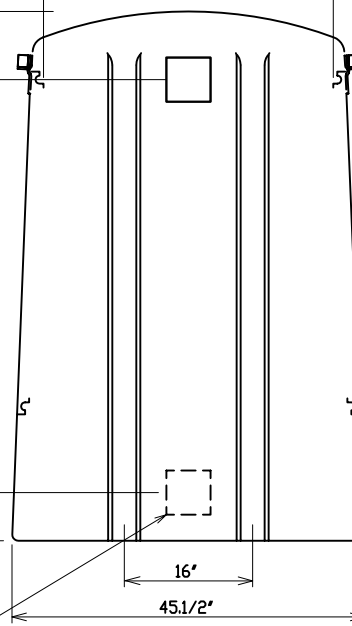

END VIEW

VENTILATING LOUVER
ONE HIGH END SHOWN
ONE LOW END OPP.
SEE LOUVER DETAIL

ORDERING INFORMATION:

MODEL	PE 2 - 44 - 2 - L1 - WG	COLOR	LG - LIGHT GRAY WG - LIGHT GREEN MG - MUNSELL GREEN OTHER COLORS AVAIL. CONSULT FACTORY
NUMBER OF DOORS	2	L1	PROVISION FOR PADLOCKING ONLY
NOMINAL WIDTH	44	L2	PROVISION FOR PADLOCKING & PENTA HEAD BOLT
OVERALL HEIGHT (AS SHOWN ON DRAWING)	2	L4	PROVISION FOR PADLOCKING, PENTA HEAD BOLT & INNER DOORS

NOTE:

1. MATERIAL:

- 1) FIBERGLASS LAMINATE 3/16" NOMINAL THICKNESS
- 2) EXTERIOR UV STABILIZED GELCOAT - 14 MIL NOMINAL THICKNESS
- WHITE INTERIOR GELCOAT
- 3) FIRE RETARDANT - DOES NOT SUPPORT COMBUSTION
- 4) STAINLESS STEEL HARDWARE
- 5) ESTIMATED WEIGHT-

2. STANDARDS:

- 1) CONFORMS TO IEEE C57.12.28, PADMOUNT EQUIPMENT ENCLOSURE
INTEGRITY STANDARD
- 2) CERTIFIED TEST DATA OF ASTM STRUCTURAL STANDARDS
AVAILABLE UPON REQUEST

ENCLOSURE DETAILS

PE2-44-2



POWER DESIGN INC.
ODELL, OREGON

DRAWN:
RB

PAGE

DATE
12-17-07

DRAWING NO.
3132

FILE REF: