



TOP VIEW

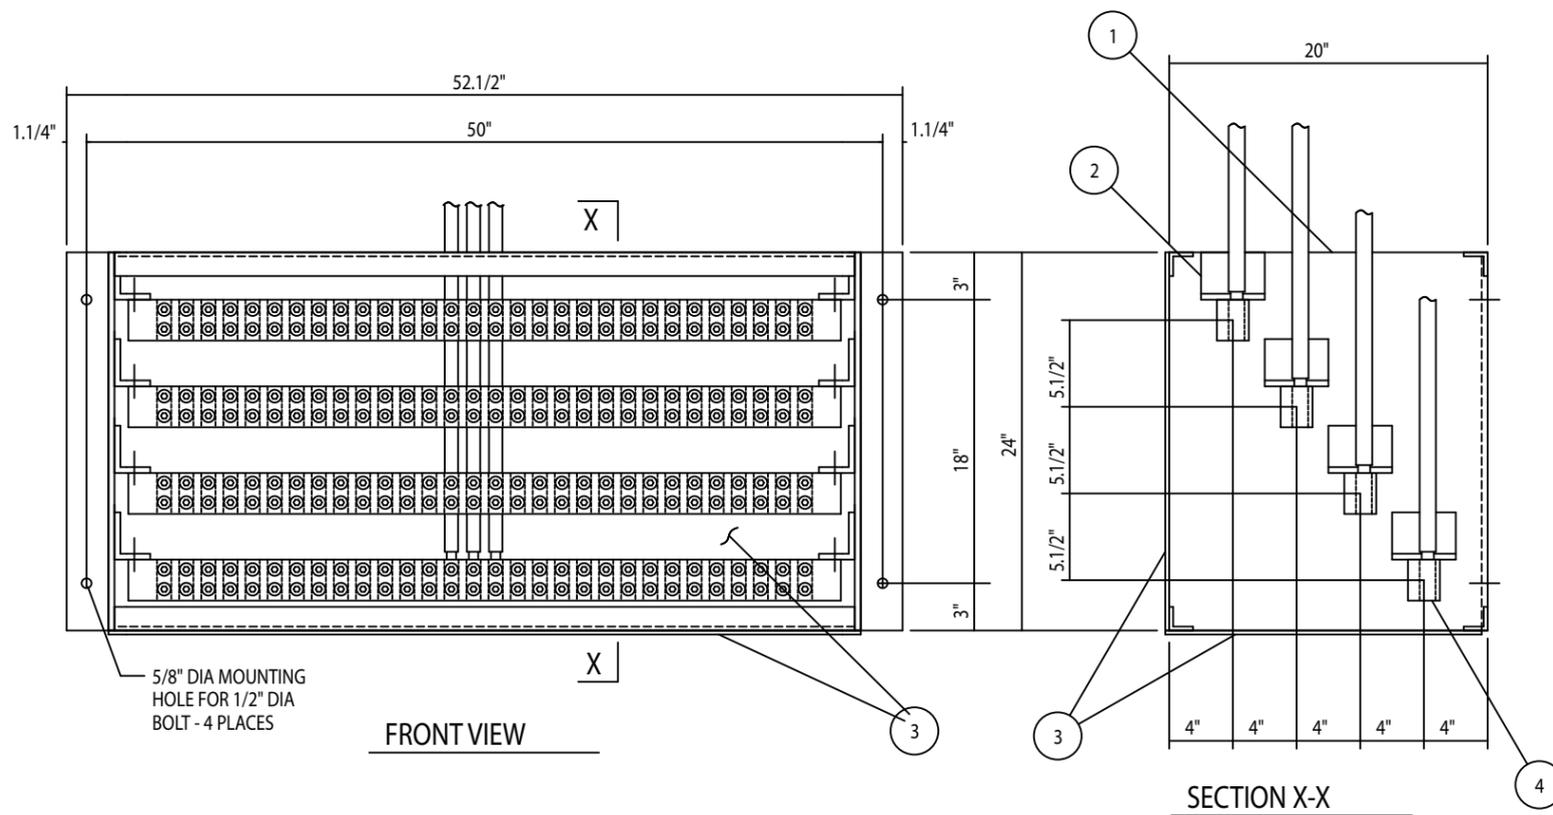

5/8" DIA MOUNTING HOLE FOR 1/2" DIA BOLT - 4 PLACES

FRONT VIEW

SECTION X-X



DETAIL

MATERIAL LIST - STANDARD UNIT

ITEM	DESCRIPTION
1	GALVANIZED STEEL MOUNTING FRAME
2	FIBERGLASS ANGLE INSULATOR - GPO-3
3	1/4" THICK CLEAR LEXAN COVER BARRIER
4	ALUMINUM SET SCREW CONNECTOR - 30 POSITION - #2-750MCM CONDUCTOR RANGE

NOTE:

1. MAXIMUM AMPERES RATING IS BASED ON ALTERNATING SOURCE AND TAP CONNECTIONS PER DETAIL

CATALOG NO: MB-40-30-1766

WALL MOUNT SECONDARY SWITCHGEAR

600V 4000 AMP (30) 750MCM

THREE PHASE (1) 30 POSITION CONNECTOR PER PHASE + NEUTRAL



DRAWN: BB	PAGE	DATE 1-18-01	DRAWING NO. 1766-R2
--------------	------	-----------------	------------------------

FILE REF: