


TOP VIEW

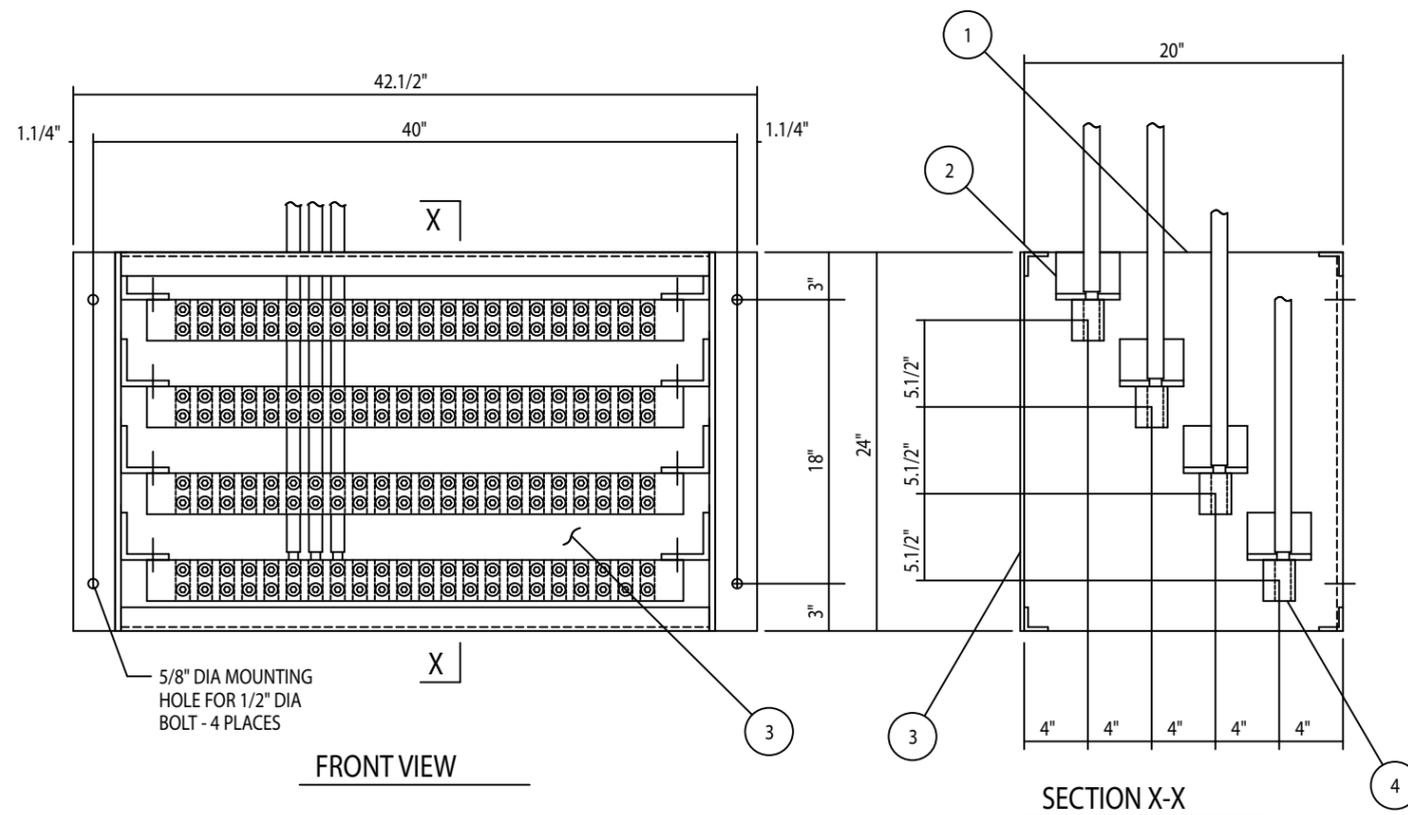

FRONT VIEW

SECTION X-X

MATERIAL LIST - STANDARD UNIT

ITEM	DESCRIPTION
1	GALVANIZED STEEL MOUNTING FRAME
2	FIBERGLASS ANGLE INSULATOR - GPO-3
3	1/4" THICK CLEAR LEXAN COVER BARRIER
4	ALUMINUM SET SCREW CONNECTOR - 22 POSITION - #2-750MCM CONDUCTOR RANGE

CATALOG NO: MB-40-22-4124

WALL MOUNT SECONDARY SWITCHGEAR

600V 4000 AMP (22) 750MCM

THREE PHASE (1) 22 POSITION CONNECTOR PER PHASE + NEUTRAL



DRAWN: JAB	PAGE	DATE 2-23-16	DRAWING NO. 4124-R1
---------------	------	-----------------	------------------------

FILE REF: