



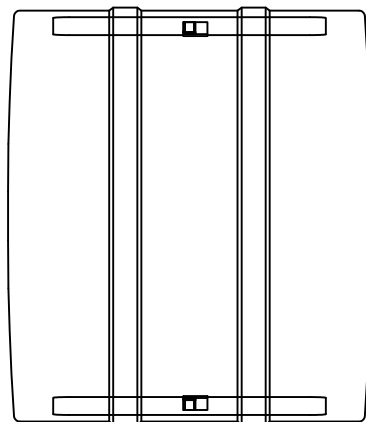

TOP VIEW

RECESSED, CAPTIVE PENTA BOLT

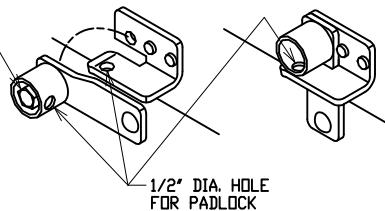


1/2" DIA. HOLE FOR PADLOCK

LATCH DETAIL

1/2" ANCHOR BOLT, NUT & FLATWASHER (BY CUSTOMER)


MOUNTING FLANGE ON ENCLOSURE

ENCLOSURE HOLD DOWN DETAIL

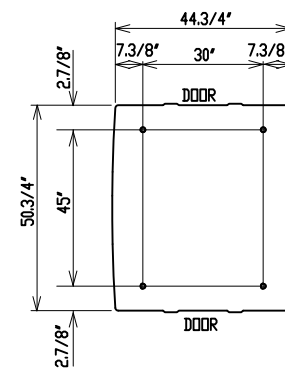

ANCHOR BOLT DIMENSIONS

ANCHOR BOLTS TO BE 1/2" DIA. AND TO EXTEND 1 1/2" MINIMUM ABOVE PAD. PROVIDE CABLE ENTRY AS REQUIRED.



VENT
16 GAUGE (.060)
STAINLESS STEEL

ENCLOSURE WALL

SCREEN BAFFLE
20 GAUGE (.036)
STAINLESS STEEL

1/8" STNLS STL
POP RIVET
8 PLACES


LOUVER DETAIL

ORDERING INFORMATION:

MODEL	PE 2 - 46 - 1 - L1 - WG	COLOR	LG - LIGHT GRAY WG - LIGHT GREEN MG - MUNSELL GREEN OTHER COLORS AVAIL. CONSULT FACTORY
NUMBER OF DOORS	2		
NOMINAL WIDTH	46		
OVERALL HEIGHT (AS SHOWN ON DRAWING)	1		
			L1 - PROVISION FOR PADLOCKING ONLY L2 - PROVISION FOR PADLOCKING & PENTA HEAD BOLT L4 - PROVISION FOR PADLOCKING, PENTA HEAD BOLT & INNER DOORS


NOTE:

- MATERIAL:
 - FIBERGLASS LAMINATE 3/16" NOMINAL THICKNESS
 - EXTERIOR UV STABILIZED GELCOAT - 14 MIL NOMINAL THICKNESS
 - FIRE RETARDANT - DOES NOT SUPPORT COMBUSTION
 - STAINLESS STEEL HARDWARE
- STANDARDS:
 - CONFORMS TO ANSI C57.12.28, PADMOUNT EQUIPMENT ENCLOSURE INTEGRITY STANDARD
 - CERTIFIED TEST DATA OF ASTM STRUCTURAL STANDARDS AVAILABLE UPON REQUEST

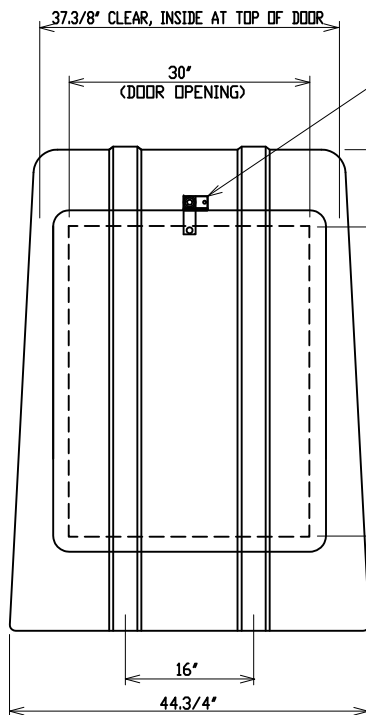

FRONT VIEW

VENTILATING LOUVER
TWO HIGH END SHOWN
TWO LOW END OPP.
SEE LOUVER DETAIL

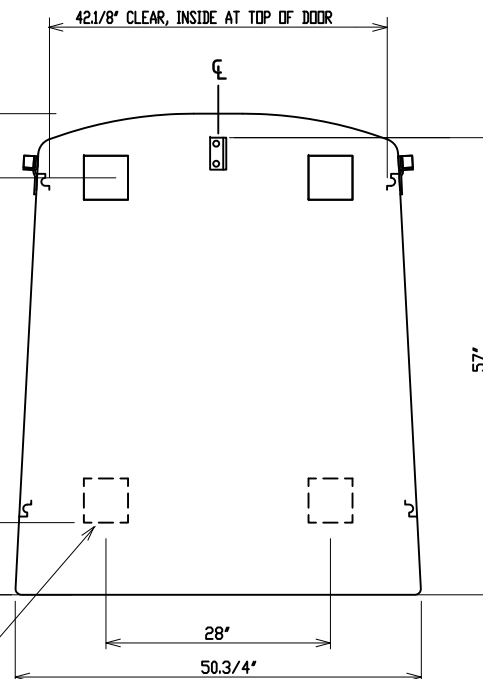

END VIEW

ENCLOSURE DETAILS

PE2-46-1



POWER DESIGN INC.
ODELL, OREGON

DRAWN:
RB

PAGE

DATE
12-17-07

DRAWING NO.
3151-R1

FILE REF: